


SPECIFICATIE TEHNICA - F1002L

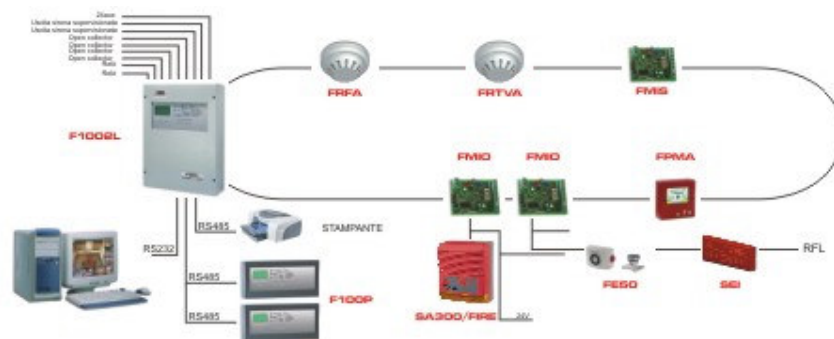

Caratteristiche Funzionali:

- Possibility of centralization from PC with graphical program local/lan
- Activation of magnetic test
- Alphanumeric back-light display 128x64 pixel 8 lines of 21 characters
- Predisposition for 2 additional serial exits (RS232-RS485), PS2 entry for local configuration or for keyboard commands with the guided menu
- Exit relay and exit open collector, triggered by events
- EN 54 approved under 2/4 CE european directives

Caratteristiche Tecniche:

Digital loops	2 of 120 units (fully customizable) not expandible + 7 line insulator modules
Output relay	2
Alarm open collector outputs	4
External box	metal box can lodge 2 batteries from 7Ah/12v (not included)
Dimensions (W)	327mm
Dimensions (H)	445mm
Dimensions (D)	82mm